



	WATER CONNECTION 3/4" G
	DRAINING 15/16 inch
	ELECTRICAL SUPPLY

TECHNICAL DATA		STANDARD	
EXTERNAL DIMENSIONS			
width	(inch)	23 7/16"	
depth	(inch)	24"	
height	(inch)	33 5/16"	
WEIGHT	(lbs)	134,5	
VOLTAGE		220V-240V 1 ph 60Hz	
POWER REQUIRED		7090 W	
WATER HARDNESS		2-8 °F	
INLET WATER PRESSURE (170 - 620 kPa)		25 - 90 PSI	
CROCKERY DIMENSIONS			
plates diameter	(inch)	12 13/16"	
dishes max. height	(inch)	12 3/16"	
RACK DIMENSIONS	(inch)	20" x 20"	
RACK EQUIPMENT		1XC40 - 1XC44 - 1X15060	
WASHING CYCLES	(sec)	1 (120)	2 (180)
WATER SUPPLY 131°F			
racks/h(*) ⁽¹⁾		30	20
WATER SUPPLY 50°F			
racks/h(*) ⁽¹⁾		21	20
WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI)	[gal(US)]	0,74	
BOOSTER CAPACITY	[gal(US)]	1,5	
BOOSTER HEATING ELEMENT		6530 W	
RINSING TEMPERATURE (SET)		185°F	
TANK CAPACITY	[gal(US)]	7,13	
TANK HEATING ELEMENT		2940 W	
TANK TEMPERATURE (SET)		160°F	
PUMP POWER		560 W (89,8 gal(US)/min ^{***})	
DRAIN PUMP		43W hMAX 31 1/2" (10,78 gal(US)/min ^{***})	
NOISE		59.3 dB(A)	

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

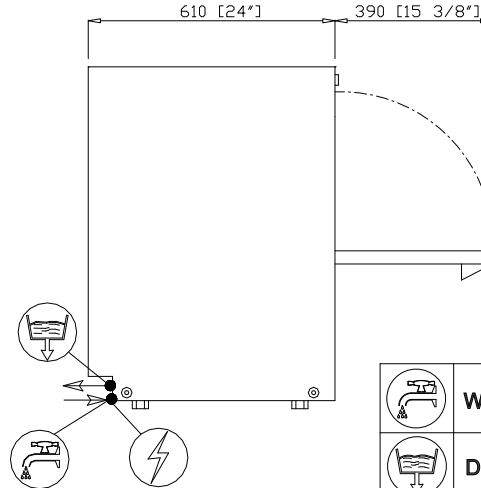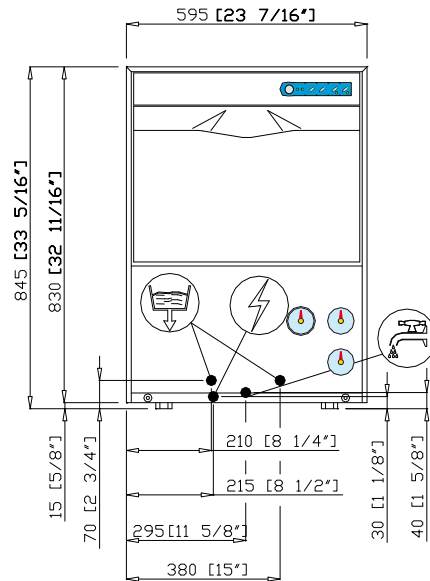

	WATER CONNECTION 3/4\"G
	DRAINING 15/16 inch
	ELECTRICAL SUPPLY

TECHNICAL DATA	STANDARD	
EXTERNAL DIMENSIONS		
width (inch)	23 7/16"	
depth (inch)	24"	
height (inch)	33 5/16"	
WEIGHT (lbs)	134,5	
VOLTAGE	220V-240V 3 ph 60Hz	
POWER REQUIRED	7090 W	
WATER HARDNESS	2-8 °F	
INLET WATER PRESSURE (170 - 620 kPa)	25 - 90 PSI	
CROCKERY DIMENSIONS		
plates diameter (inch)	12 13/16"	
dishes max. height (inch)	12 3/16"	
RACK DIMENSIONS (inch)	20" x 20"	
RACK EQUIPMENT	1XC40 - 1XC44 - 1X15060	
WASHING CYCLES (sec)	1 (120)	2 (180)
WATER SUPPLY 131°F		
racks/h(*) ⁽¹⁾	30	20
WATER SUPPLY 50°F		
racks/h(*) ⁽¹⁾	21	20
WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI) [gal(US)]	0,74	
BOOSTER CAPACITY [gal(US)]	1,5	
BOOSTER HEATING ELEMENT	6530 W	
RINSING TEMPERATURE (SET)	185°F	
TANK CAPACITY [gal(US)]	7,13	
TANK HEATING ELEMENT	2940 W	
TANK TEMPERATURE (SET)	160°F	
PUMP POWER	560 W (89,8 gal(US)/min ^{***})	
DRAIN PUMP	43W hMAX 31 1/2"(10,78 gal(US)/min ^{***})	
NOISE	59.3 dB(A)	

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.