
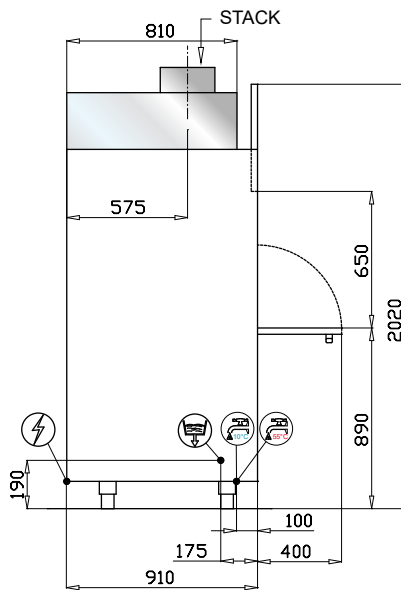


EXIT AIR TEMPERATURE :
 27°C

HUMIDITY:
 90%

AIR FLOW RATE:
 200 m³/h

RECOVERY PER HOUR:
 3 kWh
 (VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

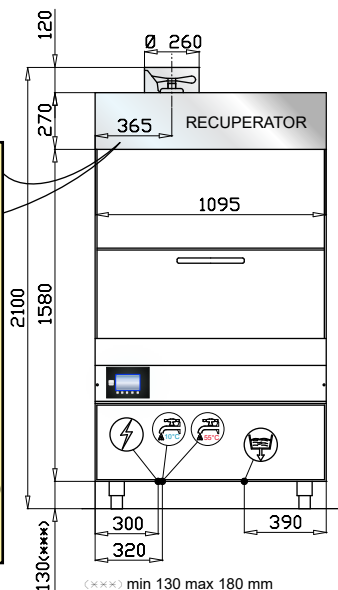

load capacity trays:
 -6 gn 1/1 max depth 65mm
 -3 gn 1/1 max depth 230mm
 -2 gn 2/1 max depth 140mm
 -1 gn 2/1 max depth 500mm

	HOT WATER CONNECTION 3/4" GAS MAX 55°C
	COLD WATER CONNECTION 3/4" GAS 10°C
	DRAIN PIPE Ø 32mm
	ELECTRICAL SUPPLY

TECHNICAL DATA	
EXTERNAL DIMENSIONS	
width	1095 mm
depth	910 mm
height	2100 mm
WEIGHT(basic version)	320 kg
VOLTAGE	400V 3N 50Hz
POWER REQUIRED	12975 W
WATER HARDNESS	< 8 °F
WATER CONDUCTIBILITY	> 200 µS/cm
INLET WATER PRESSURE	200-400 kPa
CROCKERY DIMENSIONS	
trays max. height	635 mm

RACK DIMENSIONS Ø735Xh240 mm	
RACK EQUIPMENT	1X96100-1X96101-1X96102-1X96103-1X96104-1X96105-1X96135-4X96136
WASHING CYCLES water/granules(Min)	1/2(5) 3/4(7) 5/6(9) 7/8(11) 9/10(13) 11/12(16)
WATER SUPPLY 55°C	
racks/h(*) ⁽¹⁾	- - - - - -
WATER SUPPLY 15°C	
racks/h(*) ⁽¹⁾	12 8,5 6,5 5,5 4,5 3,5
WATER CONSUMPTION / CYCLE	4,4 L
BOILER CAPACITY	20 L
BOILER HEATING ELEMENT	9000 W
RINSING TEMPERATURE (SET)	85°C
TANK CAPACITY	103 L
TANK HEATING ELEMENT	9000 W
TANK TEMPERATURE (SET)	55°C
WASHING PUMP POWER	3780 W (900 L/min ^{***})
RINSING PUMP POWER	250 W (150 L/min ^{***})
OPERATING NOISE	79 dB(A)

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.