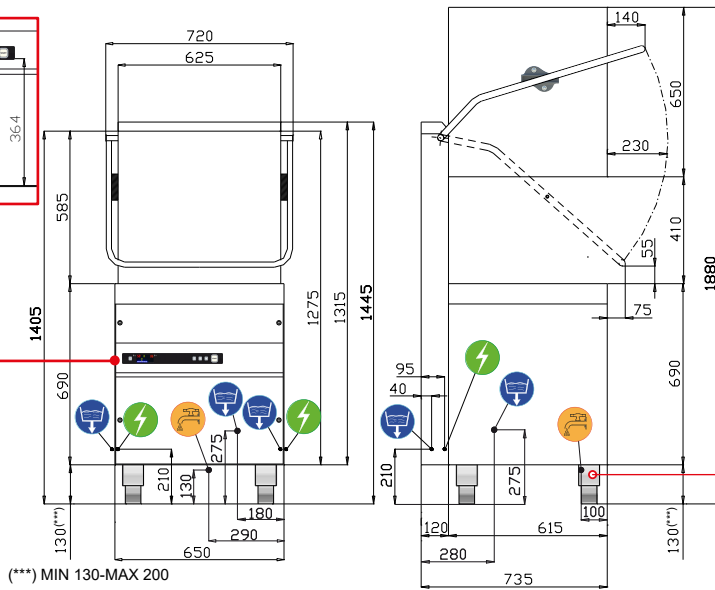

CONTROL PANEL POSITION


(***) MIN 130-MAX 200


PIEDINO "MARINA" "MARINA" FOOT


- WATER CONNECTION 3/4" GAS**
- DRAINING PIPE Ø 24mm**
- ELECTRICAL SUPPLY**

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
width	720 mm				
depth	735 mm				
height	1445/1880(open hood) mm				
WEIGHT	100 kg				
VOLTAGE	400V 3N 50Hz				
POWER REQUIRED	6900 W				
WATER HARDNESS	2-8 °F				
INLET WATER PRESSURE	200-400 kPa				
CROCKERY DIMENSIONS					
plates diameter	410 mm				
trays max. dimension	GASTRONORM 1/1 (530x325)				
RACK DIMENSION	500X500 mm				
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060				
WASHING CYCLES	(s)	1(50)	2(80)	3(120)	4(180)
WATER SUPPLY 55°C					
racks/h(*) ⁽¹⁾	72	45	30	20	
WATER SUPPLY 10°C					
racks/h(*) ⁽¹⁾	22	22	22	20	
WATER CONSUMPTION / CYCLE (water pressure 200kPa)	2.8 l				
BOILER CAPACITY	10 l				
BOILER HEATING ELEMENT	6000 W				
RINSING TEMPERATURE (SET)	85°C				
TANK CAPACITY	30 l				
TANK HEATING ELEMENT	2700 W				
TANK TEMPERATURE (SET)	55°C				
PUMP POWER	900 W(500 L/min ^{***})				
DRAIN PUMP (optional)	25W h MAX scarico 0,8m(40L/min ^{***})				
NOISE	63,6±0.7 dB(A)				

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(†) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.