



	WATER CONNECTION 3/4" GAS
	DRAINING Ø 24mm
	ELECTRICAL SUPPLY


PIEDINO MARINA / MARINA FOOT


(***) MIN 130-MAX 200

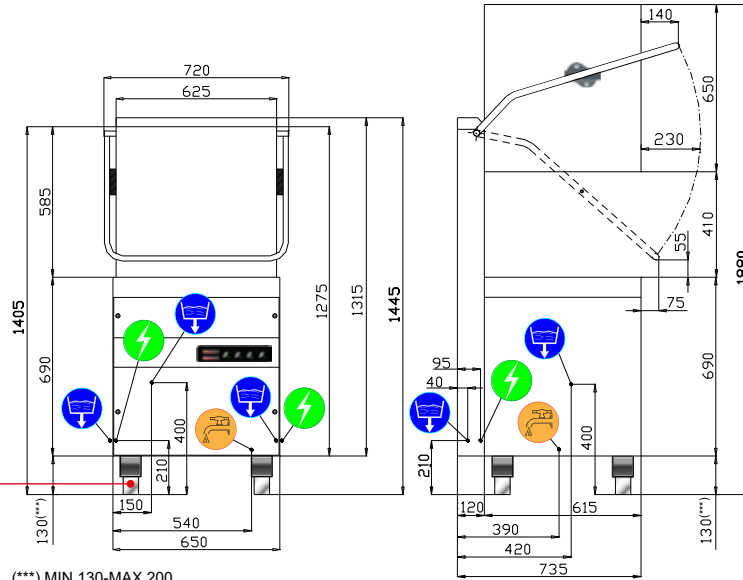

TECHNICAL DATA	
EXTERNAL DIMENSIONS	
width	720 mm
depth	735 mm
height	1445/1880(open hood) mm
WEIGHT	100 kg
VOLTAGE	400V 3N 50Hz
POWER REQUIRED	6900 W
WATER HARDNESS	2-8 °F
INLET WATER PRESSURE	200-400 kPa
CROCKERY DIMENSIONS	
plates diameter	410 mm
trays max. dimension	GASTRONORM 1/1 (530x325)
RACK DIMENSION	500X500 mm
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060
WASHING CYCLES (s)	1(50) 2(180)
WATER SUPPLY 55°C	
racks/h(*) ⁽¹⁾	46 20
WATER SUPPLY 10°C	
racks/h(*) ⁽¹⁾	20 20
WATER CONSUMPTION / CYCLE (water pressure 200kPa)	2.8 l
BOILER CAPACITY	10 l
BOILER HEATING ELEMENT	6000 W
RINSING TEMPERATURE (SET)	85°C
TANK CAPACITY	30 l
TANK HEATING ELEMENT	2700 W
TANK TEMPERATURE (SET)	55°C
PUMP POWER	900 W(500 L/min ^{***})
DRAIN PUMP (optional)	25W h MAX scarico 0,8m(40L/min ^{***})
NOISE	63,6±0.7 dB(A)

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(†) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.