


	ENTRATA ACQUA 3/4" GAS
	SCARICO ACQUA Ø24mm
	ALLACCIAMENTO ELETTRICO

TECHNICAL DATA	
<b>EXTERNAL DIMENSIONS</b>	
width	(inch) 28 3/8"
depth	(inch) 28 15/16"
height	(inch) 56 7/8" - 74" ( open hood )
WEIGHT	(lbs) 231
VOLTAGE	220/240V 1ph 60 Hz
POWER REQUIRED	10920 W
WATER HARDNESS	2 - 8 °F
INLET WATER PRESSURE (170 - 620 kPa)	25 - 90 PSI
<b>CROCKERY DIMENSIONS</b>	
plates diameter	(inch) 16 1/4"
trays max. dimension	(inch) GASTRONORM 1/1
RACK DIMENSION	(inch) 20" x 20"
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060
WASHING CYCLES	(sec) 1 ( 120 )   2 ( 180 )
<b>WATER SUPPLY 131°F</b>	
racks/h(*) <sup>(1)</sup>	30   20
<b>WATER SUPPLY 50°F</b>	
racks/h(*) <sup>(1)</sup>	30   20
WATER CONSUMPTION / CYCLE (rinse pressure 17 Psi )	[gal(US)] 0,79
BOOSTER CAPACITY	[gal(US)] 2,66
BOOSTER HEATING ELEMENT	9800 W
RINSING TEMPERATURE (SET)	185°F
TANK CAPACITY	[gal(US)] 7,93
TANK HEATING ELEMENT	2940 W
TANK TEMPERATURE (SET)	160°F
PUMP POWER	1120 W (166 gal(US)/min <sup>***</sup> )
DRAIN PUMP	43W hMAX 31 1/2"(10,78 gal(US)/min <sup>***</sup> )
NOISE	63,6±0.7 dB(A)

(\*) STANDARD TERMOSTOP

(\*\*\*) MAXIMUM FLOW RATE

(<sup>1</sup>) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

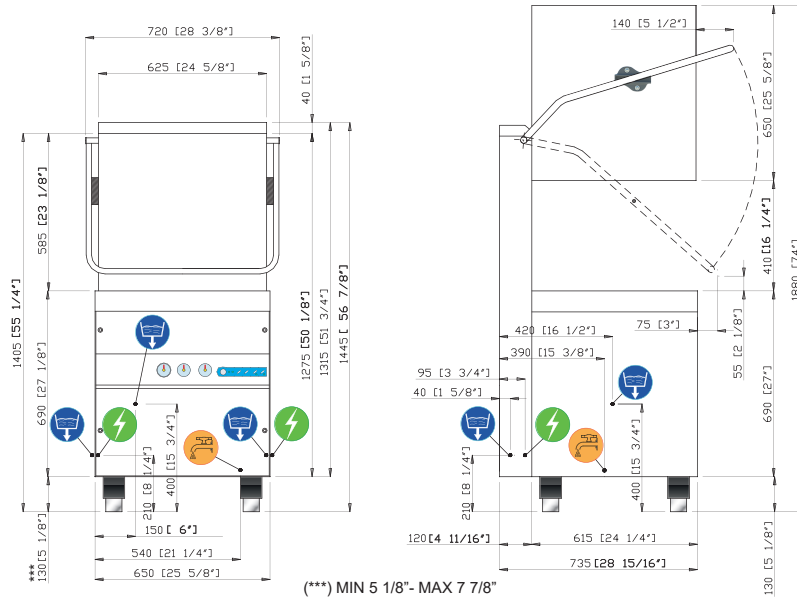

	ENTRATA ACQUA 3/4" GAS
	SCARICO ACQUA Ø24mm
	ALLACCIAMENTO ELETTRICO

TECHNICAL DATA	
<b>EXTERNAL DIMENSIONS</b>	
width	(inch) 28 3/8"
depth	(inch) 28 15/16"
height	(inch) 56 7/8" - 74" ( open hood )
WEIGHT	(lbs) 231
VOLTAGE	220/240V 3ph 60 Hz
POWER REQUIRED	10920 W
WATER HARDNESS	2 - 8 °F
INLET WATER PRESSURE (170 - 620 kPa)	25 - 90 PSI
<b>CROCKERY DIMENSIONS</b>	
plates diameter	(inch) 16 1/4"
trays max. dimension	(inch) GASTRONORM 1/1
RACK DIMENSION	(inch) 20" x 20"
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060
WASHING CYCLES	(sec) 1 ( 120 )   2 ( 180 )
<b>WATER SUPPLY 131°F</b>	
racks/h(*) <sup>(1)</sup>	30   20
<b>WATER SUPPLY 50°F</b>	
racks/h(*) <sup>(1)</sup>	----   ----
WATER CONSUMPTION / CYCLE (rinse pressure 17 Psi )	[gal(US)] 0,79
BOOSTER CAPACITY	[gal(US)] 2,66
BOOSTER HEATING ELEMENT	9800 W
RINSING TEMPERATURE (SET)	185°F
TANK CAPACITY	[gal(US)] 7,93
TANK HEATING ELEMENT	2940 W
TANK TEMPERATURE (SET)	160°F
PUMP POWER	1120 W (166 gal(US)/min <sup>***</sup> )
DRAIN PUMP	43W hMAX 31 1/2"(10,78 gal(US)/min <sup>***</sup> )
NOISE	63,6±0.7 dB(A)

(\*) STANDARD TERMOSTOP

(\*\*\*) MAXIMUM FLOW RATE

(<sup>1</sup>) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.