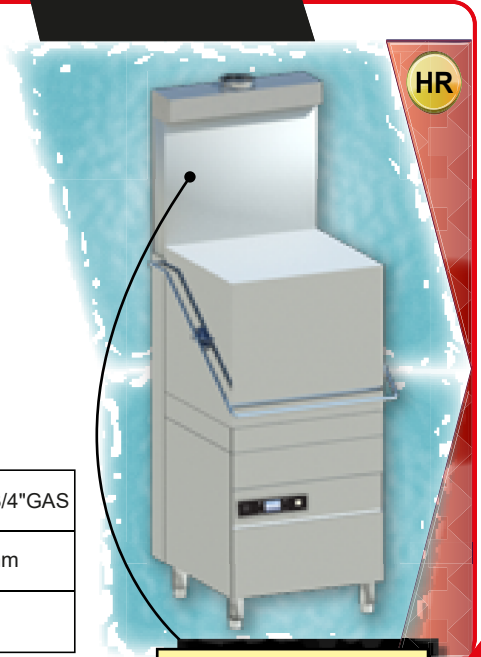


	WATER CONNECTION 3/4" GAS
	DRAINING PIPE Ø 28mm
	ELECTRICAL SUPPLY


TECHNICAL DATA
EXTERNAL DIMENSIONS

width	720 mm
depth	735 mm
height	2095 mm
WEIGHT(basic version)	145 kg
VOLTAGE	400V 3N 50Hz
POWER REQUIRED	9900 W
WATER HARDNESS	< 8 °f
WATER CONDUCTIVITY	> 200 µS/cm
INLET WATER PRESSURE	200-400 kPa

EXIT AIR TEMPERATURE :	25°C
HUMIDITY:	60%
AIR FLOW RATE:	105 m³/h
HEAT RECOVERY PER HOUR:	6 kWh
(VALUES CALCULATED ON THE BASIS OF THE SHORTEST CYCLE)	

CROCKERY DIMENSIONS

plates diameter	410 mm
trays max. dimension	GASTRONORM 1/1 (530x325)
RACK DIMENSION	500X500 mm
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060

WASHING CYCLES (s)	0(21÷680)(**)	H1 (180)	H2 (630)	1 (50)	2 (90)	3(120)	4(180)	5(300)
--------------------	---------------	-----------	-----------	--------	--------	--------	--------	--------

WATER SUPPLY 10°C

racks/h(*) (1)	/	3	3	40	40	30	20	12
----------------	---	---	---	----	----	----	----	----

WATER CONSUMPTION / CYCLE	3,5 l
---------------------------	-------

BOILER CAPACITY	15 l
-----------------	------

BOILER HEATING ELEMENT	9000 W
------------------------	--------

RINSING TEMPERATURE (SET)	70°C-90°C(**)	90°C	87°C	82°C
---------------------------	---------------	------	------	------

TANK CAPACITY	20 l
---------------	------

TANK HEATING ELEMENT	2700 W
----------------------	--------

TANK TEMPERATURE (SET)	50°C-70°C(**)	75°C	70°C	60°C
------------------------	---------------	------	------	------

PUMPS POWER washing/rinsing	900W (500 l/min***) / 250 W
-----------------------------	-----------------------------

DRAIN PUMP	25W (40 l/min***)
------------	-------------------

NOISE	63.6±0.7 dB(A)
-------	----------------

(*) STANDARD THERMOSTOP / (***) MAXIMUM FLOW RATE / (**) CUSTOM CYCLE

(†) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.