


	WATER CONNECTION 3/4" GAS
	DRAINING PIPE Ø 28mm
	ELECTRICAL SUPPLY

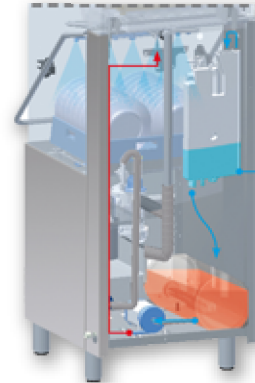

(***) MIN 130-MAX 200 mm

TECHNICAL DATA								
EXTERNAL DIMENSIONS								
width	720 mm							
depth	735 mm							
height	1445/1880 (open hood)							
WEIGHT(basic version)	125 kg							
VOLTAGE	400V 3N 50Hz							
POWER REQUIRED	9900 W							
WATER HARDNESS	2-8 °f							
INLET WATER PRESSURE	200-400 kPa							
CROCKERY DIMENSIONS								
plates diameter	410 mm							
trays max. dimension	GASTRONORM 1/1 (530x325)							
RACK DIMENSION	500X500 mm							
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060							
WASHING CYCLES (s)	0(21+680)**	1 (50)	2 (90)	3(120)	4(180)	5(300)		
WATER SUPPLY 55°C								
racks/h(*) ⁽¹⁾	/	55	40	30	20	12		
WATER SUPPLY 10°C								
racks/h(*) ⁽¹⁾	/	25	25	25	20	12		
WATER CONSUMPTION / CYCLE	3,5 l							
BOILER CAPACITY	15 l							
BOILER HEATING ELEMENT	9000 W							
RINSING TEMPERATURE (SET)	70÷90°C(**)						82°C	
TANK CAPACITY	20 l							
TANK HEATING ELEMENT	2700 W							
TANK TEMPERATURE (SET)	50÷70°C(**)						60°C	
PUMPS POWER washing / rinsing	900W (500 l/min***)/250 W							
DRAIN PUMP	25 W (40 l/min***)							
NOISE	63.6±0.7 dB(A)							

(*) STANDARD THERMOSTOP / (***) MAXIMUM FLOW RATE / (**) CUSTOM CYCLE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.